



City of Palm Springs

Department of Building & Code Enforcement
3200 East Tahquitz Canyon Way, Palm Springs CA 92262
PO Box 2743, Palm Springs CA 92263
Tel 760.323-8242 P Fax 760.322.8360 P TDD 760.864.9527
www.palmsprings-ca.gov

Corrugated Metal Fence 2015


Design is limited to six (6) foot maximum height

Notes:

1. Minimum 24 Gauge steel or aluminum panel thickness.
2. Supports are 2x2 tubular steel spaced a maximum of 6 feet on center.
3. Supports are buried a minimum of one third the exposed fence height.
4. Attach panels to tubular steel with #12 x 1 inch self-tap screws at each rib.

Inspections:

1. Footing: After trenching and placement of steel, but prior to pour.
2. Final: When all work is complete.
3. Final: When all work is complete.

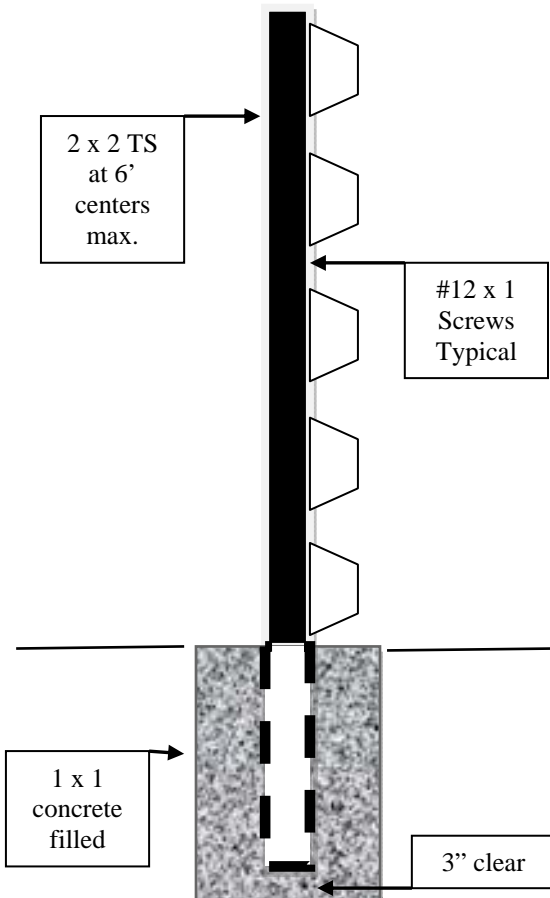

Disclaimer: Alternate designs may be possible when provided with engineered analysis. Use of this standard design is at the user's risk and carries no implied or inferred guarantee.