## ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY
ATIONAL FLOOD INSURANCE PROGR

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.


	instructions to com	·	PHATION		FOR INSURANCE COMPANY USE	
SECTION A PROPERTY INFORMATION					POLICY NUMBER	
UILDING OWNER'S NAME	NCINEER					
UNKNOWN BY THE ENGINEER  STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER  2700 Golf Course Drive					COMPANY NAIC NUMBER	
THER DESCRIPTION (Lot and B Building "E", I	lock Numbers, etc.)					
ITY				STATE	ZIP CODE 92262	
Palm Springs, Ca		OOD NICHEA	NCE RATE MAP (FIRM)	Ca.		
			NCE BATE MAI (FIRM)			
rovide the following from th	ne proper FIRM (See I	nstructions):			6. BASE FLOOD ELEVATION	
1. COMMUNITY NUMBER	2 PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	(in AO Zones, use depth)	
060257  Indicate the elevation dat	0009	С	6/18/96	A		
the community's BFE:	feet N	GVD (or other	FIRM datum—see Section NG ELEVATION INFORM	B, Rent 7)	for this building site, indicate	
. Using the Elevation Cert						
below (check one)  (d). FIRM Zone AO. The one) the highest gradievel) elevated in account of the comments on Pathe FIRM [see Section or appartion under Comments on Pathe FIRM [see Section or appartion under Comments on Pathe FIRM [see Section or appartion under Comments or appartion under Comments of the Pirm [see Section or appartion under Comments of the patheone or apparticular the	the highest grade action used as the reference adjacent to the build ordance with the computum system used in age 2). (NOTE: If the B, Item 7], then converts on Page 2.)	djacent to the larence level fro fing. If no floo munity's floodpletermining the elevation date ent the elevation	m the selected diagram is display depth number is available or management ordinar above reference level elem used in measuring the ons to the datum system to	tele, is the building for the property of the	above or below (cheng's lowest floor (reference) No Unknown SVD '29 Other (describe ferent than that used on M and show the conversion	
4. Elevation reference mai	k used appears on Fl	RM: X Yes	No (See Instructions	on Page 4)		
5. The reference level election (NOTE: Use of construction case this certificate will be required once co.	ration is based on: X ction drawings is only only be valid for the bastruction is complete	actual constructions and actual construction actual construction actual	ruction  construction tilding does not yet have the course of construction	irawings ne reference lev . A post-constru	el floor in place, in which uction Elevation Certificate	
6. The elevation of the low Section B, Item 7).	rest grade immediatel	y adjacent to t	he building is: 1 13/2:2	1.17 feet NGV	D (or other FIRM datum-see	
		SECTION D	OMMUNITY INFORMAT	ION		
is not the "lowest floor" floor" as defined by the	as defined in the comordinance is:	nmunity's flood	evations specifies that the plain management ordina t NGVD (or other FIRM da it	nce, the elevani num-see Section	I indicated in Section C, Item on of the building's "lowest on B, Item 7).	

This certification is to be signed by a lange veyor, engineer, or architect who is authorized state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. Lunderstand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

James D. Feiro	RCE 24176		
CERTIFIER'S NAME Owner	LICENSE NUMBER (or A James D. Feiro, CE-LS	fix Seal)	
INTE	COMPANY NAME		
P. O. Box 12980	Palm Desert,	Ca.	92255
ane I Feio	спу 11/5/97	STATE (760) 346-8015	ZiP
BISNATURE)	DATE	PHONE	:
COMMENTS: Lowest Finis	shed Floor Elev. = 323.91	PROFESS/	ONAL
-		SI Z	C CE
		No. C-241 X EXP. 12/31	
		CIVIL	
		OF CAL	

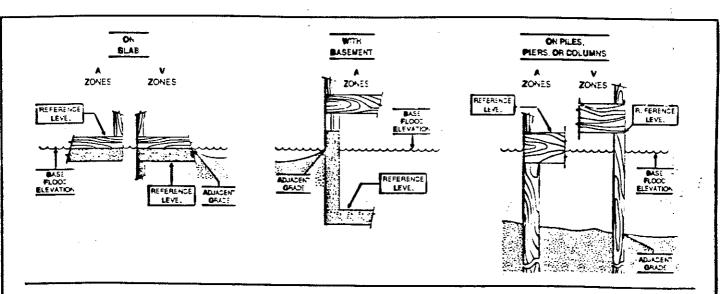

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.