
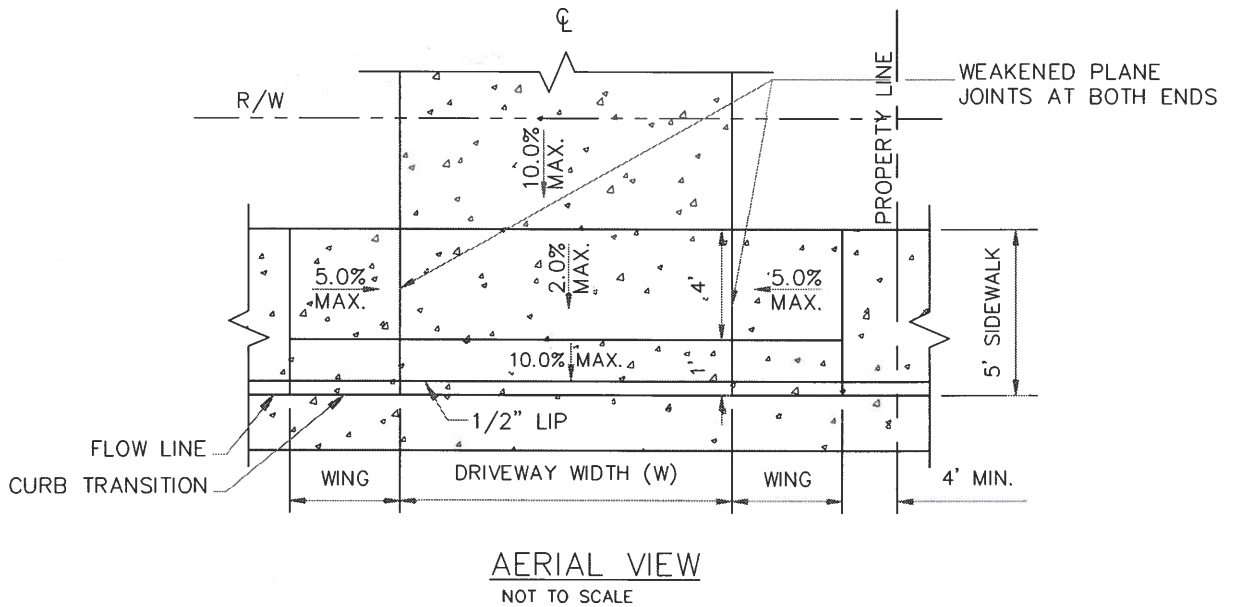



No.	REVISIONS	APPROVED	DATE



**NOTES:**

1. ALL DRIVEWAYS SHALL BE CONSTRUCTED WITH 6" THICK CLASS 560-C-3250 PORTLAND CEMENT CONCRETE.
2. WEAKENED-PLANE JOINTS SHALL BE INSTALLED AT BOTH SIDES OF ALL DRIVEWAYS AND AT APPROXIMATELY 10' (MAX.) INTERVALS.
3. A MINIMUM WIDTH (W) OF 10' FOR RESIDENTIAL DRIVEWAYS AND 24' FOR ALL OTHER DRIVEWAYS.
4. A MINIMUM OF 4' IS REQUIRED BETWEEN THE SIDE OF THE WINGS OF ANY DRIVEWAY AND THE PROPERTY LINE.

<b>CITY OF PALM SPRINGS</b> ENGINEERING DIVISION	APPROVED:  CITY ENGINEER	DATE: <u>7-13-2020</u> <u>62624</u> R.C.E.
	<b>RESIDENTIAL DRIVEWAY WITH SIDEWALK AT CURB</b>	DRAWN BY: J.D.S.
CHECKED BY: J.R.M.	DWG. NO. <b>201A</b>	