


NO.	REVISIONS	APPROVED	DATE

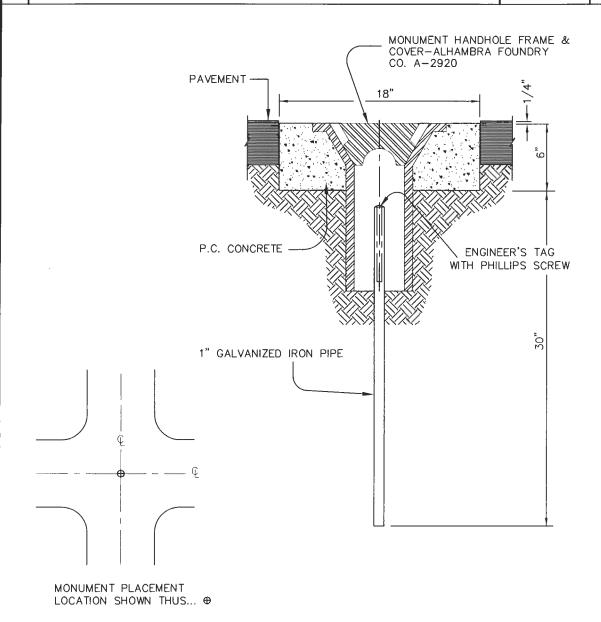

NOTES:

- 1. MONUMENT SHALL BE FURNISHED AND SET BY A LICENSED SURVEYOR OR CIVIL ENGINEER REGISTERED PRIOR TO JAN. 1, 1982. MONUMENT SHALL CONSIST OF: SURVEYOR'S OR ENGINEER'S TAG, SECURED WITH ROUND HEAD PHILLIPS SCREW, SET TO TRUE POSITION, IN TOP OF CEMENT MOTAR CORE, IN 1" GALVANIZED IRON PIPE IN CONCRETE.
- 2. FOR USE AT STREET CENTERLINE INTERSECTIONS AND SECTION CORNERS ONLY.

CITY OF PALM SPRINGS PUBLIC WORKS & ENGINEERING DEPARTMENT		APPROVEN		DATE: 14 11.7 28931	
STANDARD MONUMENT TYPE	Δ	CITY ENGINE DRAWN BY:	G.F.F.	FILE NO.	R.C.E. STANDARDS
MONOMENT TITE		CHECKED BY:	M.L.F.	DWG. NO.	100