


NO.	REVISIONS	APPROVED	DATE

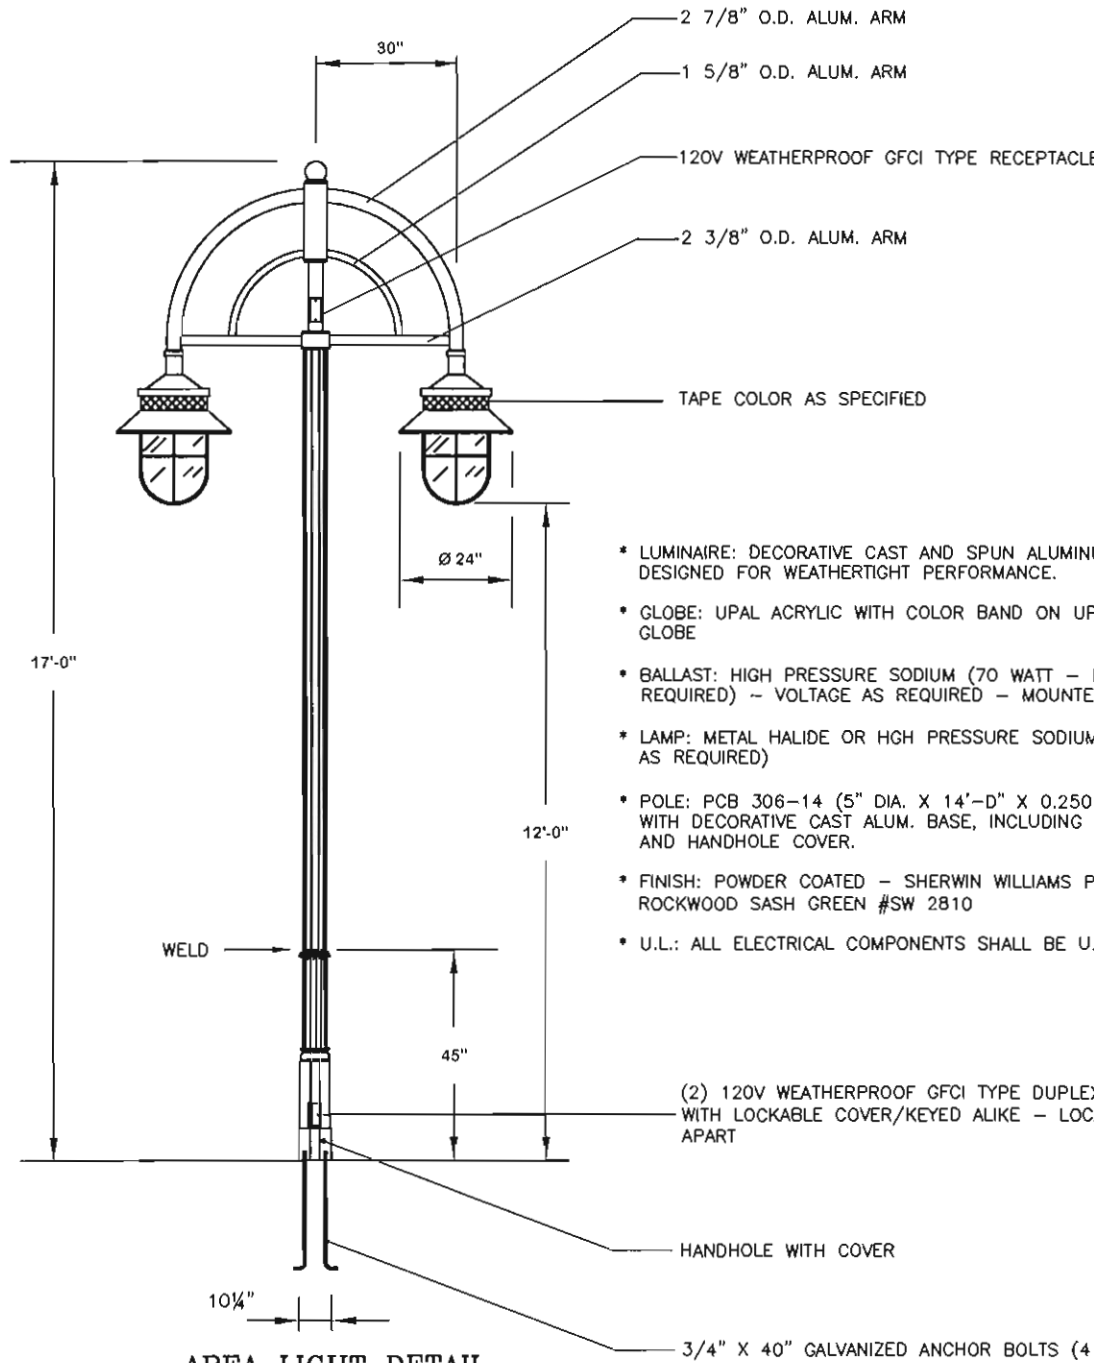

- * LUMINAIRE: DECORATIVE CAST AND SPUN ALUMINUM CONSTRUCTION. DESIGNED FOR WEATHERTIGHT PERFORMANCE.
- * GLOBE: UPAL ACRYLIC WITH COLOR BAND ON UPPER PORTION OF GLOBE
- * BALLAST: HIGH PRESSURE SODIUM (70 WATT - MAXIMUM WATTAGE AS REQUIRED) - VOLTAGE AS REQUIRED - MOUNTED IN LUMINAIRE HEAD
- * LAMP: METAL HALIDE OR HGH PRESSURE SODIUM (MAXIMUM WATTAGE AS REQUIRED)
- * POLE: PCB 306-14 (5" DIA. X 14'-D" X 0.250 WALL FLUTED ALUM.) WITH DECORATIVE CAST ALUM. BASE, INCLUDING BASE PLATE, HANDHOLE, AND HANDHOLE COVER.
- * FINISH: POWDER COATED - SHERWIN WILLIAMS PRESERVATION PALETTE ROCKWOOD SASH GREEN #SW 2810
- * U.L.: ALL ELECTRICAL COMPONENTS SHALL BE U.L. LISTED

(2) 120V WEATHERPROOF GFCI TYPE DUPLEX RECEPTACLE WITH LOCKABLE COVER/KEYED ALIKE - LOCATED 180 DEGREES APART

AREA LIGHT DETAIL

NOTES:

- MANUFACTURED BY DELTA LIGHTING SYSTEMS INC. OR EQUAL.
- FOR FOUNDATION DETAIL SEE STANDARD DRAWING NO. 909 (FOUNDATION TYPE "B")
- LAMP WATTAGE AND TYPE SUBJECT TO APPROVAL OF THE CITY ENGINEER.
- LAMP VOLTAGE SHALL BE AS REQUIRED TO CONNECT TO EXISTING ELECTRICAL SYSTEM OR 120 VOLT FOR NEW SYSTEMS.

CITY OF PALM SPRINGS PUBLIC WORKS & ENGINEERING DEPARTMENT	APPROVED: <i>[Signature]</i>	DATE: <i>12/18/07</i>
	CITY ENGINEER	28931
DOUBLE PARKING LOT LIGHT	DRAWN BY: G.F.F.	FILE NO. STANDARDS
	CHECKED BY: M.L.F.	DWG. NO. 911