



NO.	REVISIONS	APPROVED	DATE

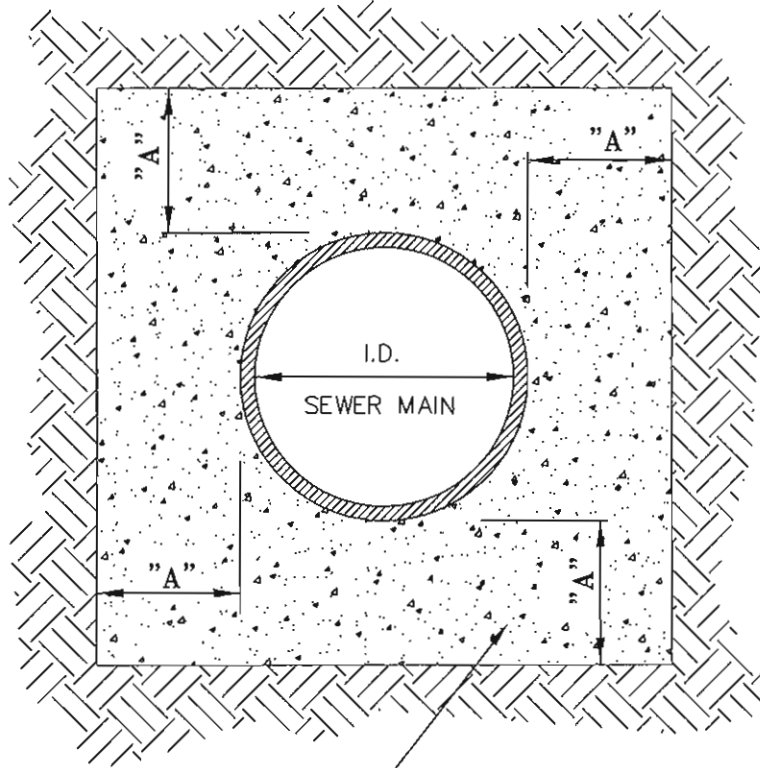

CEMENT SHALL BE PORTLAND CEMENT
CONCRETE 560C - 3250 (6 SACK)


ENCASEMENT CHART

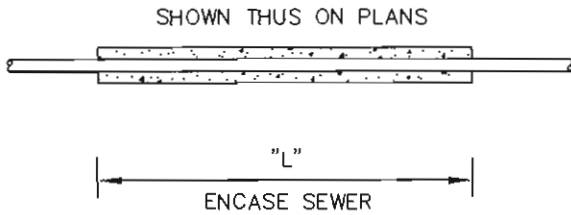

I.D. SEWER MAIN	"A" DIMENSION ENCASEMENT
8"	8"
10"	10"
12"	10"
15"	12"

NOTE:

SIZES LARGER THAN 15" I.D. PIPE SHALL REQUIRE STEEL REINFORCING AND APPROVAL BY THE CITY ENGINEER.

CITY OF PALM SPRINGS PUBLIC WORKS & ENGINEERING DEPARTMENT	APPROVED: 	DATE: <u>12/18/07</u>
	CITY ENGINEER	28931 R.C.E.
CONCRETE SEWER MAIN ENCASEMENT	DRAWN BY: G.F.F.	FILE NO. STANDARDS
	CHECKED BY: M.L.F.	DWG. NO. 407