


NO.	REVISIONS	APPROVED	DATE

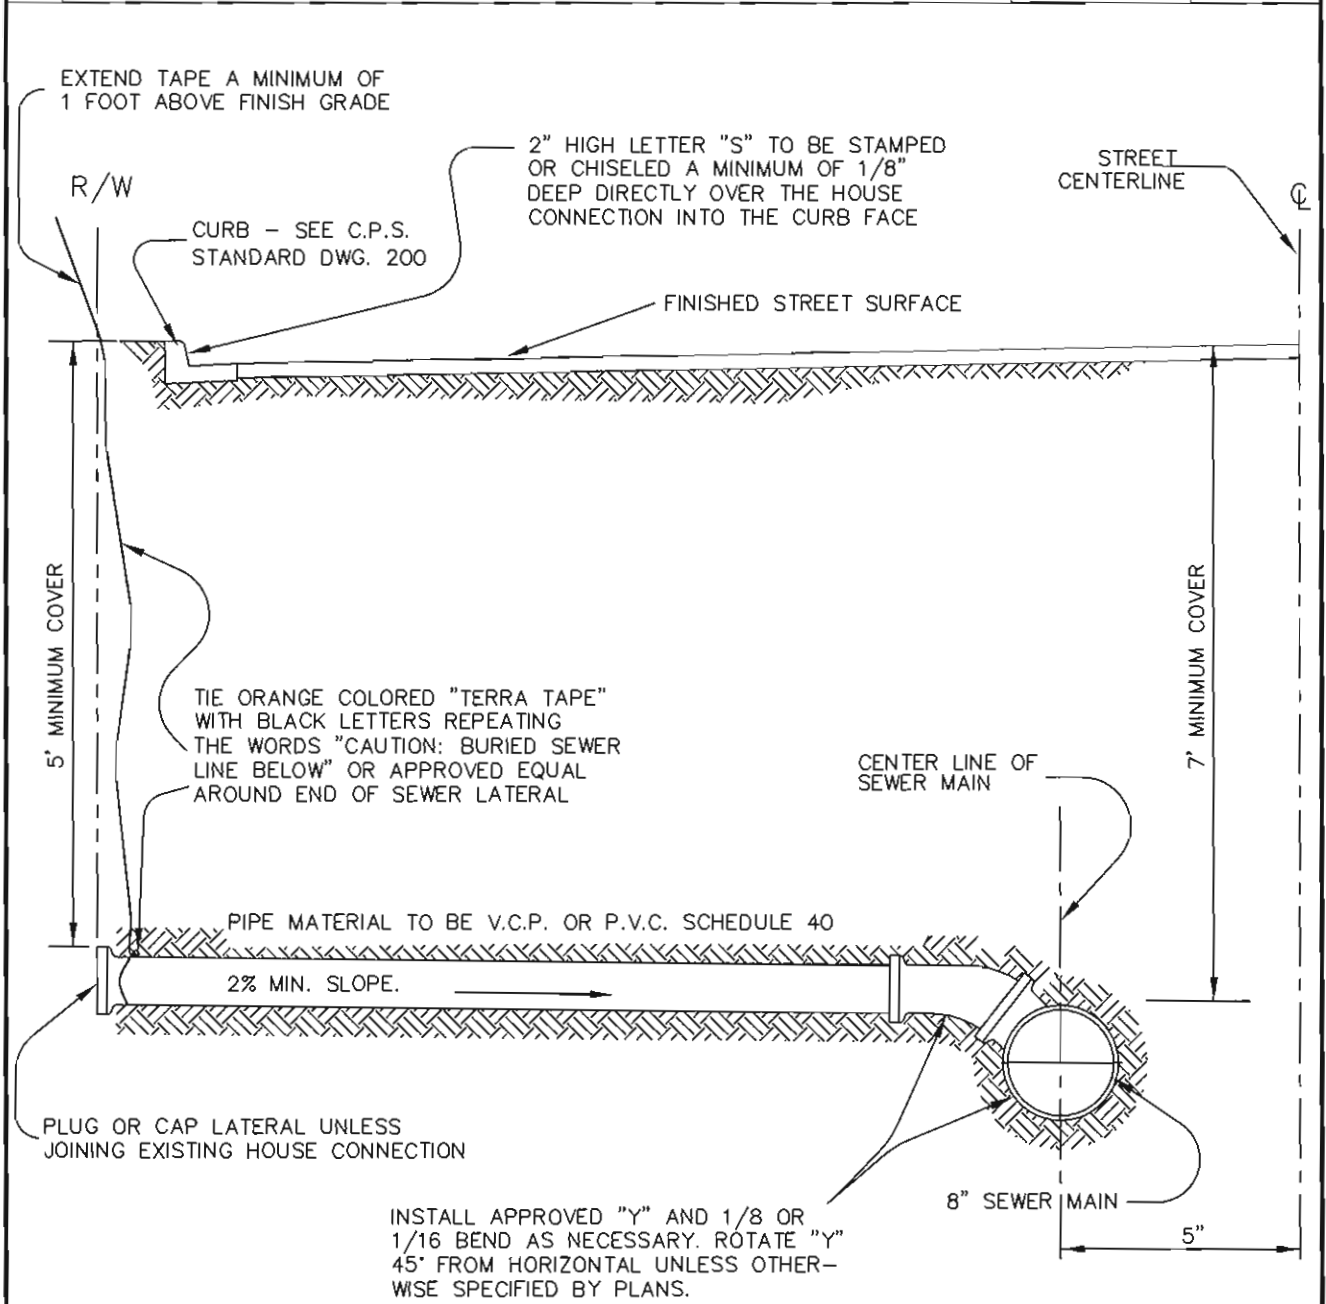

NOTE:

1. SLOPE OF LATERAL SHALL BE A MINIMUM OF 2.00% WITHIN PUBLIC R/W UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
2. LATERAL SHALL BE 4" FOR RESIDENTIAL AND 6", OR LARGER, FOR COMMERCIAL UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
3. PIPE MATERIAL SHALL BE VITRIFIED CLAY PIPE (V.C.P.) OR POLYVINYL CHLORIDE PIPE (P.V.C.) SCHEDULE 40.
4. SEE C.P.S. STD. DWG. NO. 115 FOR TRENCH AND PAVEMENT REPLACEMENT DETAILS.

CITY OF PALM SPRINGS PUBLIC WORKS & ENGINEERING DEPARTMENT	APPROVED: <i>DMB</i>	DATE: <i>1/30/08</i>
	CITY ENGINEER	28931
STANDARD SEWER LATERAL CONNECTION	DRAWN BY: G.F.F.	FILE NO. STANDARDS
	CHECKED BY: M.L.F.	DWG. NO. 405